



### Features of LiFePO4 Battery

**Longer cycle life:** Up to 2000 times longer cycle life and five times longer float/calendar life than lead acid battery, minimize replacement cost and reduce total cost.

**Lighter Weight:** About 40% of the weight of a comparable lead acid battery.

**Higher Power:** Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity

**Wider Temperature Range:** -20°C~60°C


**Super Safety:** Lithium Iron Phosphate Chemistry eliminates the risk of explosion or combustion due to high impact, over charging or short circuit situation.

**Increased Flexibility:** Modular design enables deployment of up to four batteries in series and up to four batteries in parallel.

### Application:

- \* Electric vehicles, electric mobility
- \* Solar/wind energy storage system
- \* UPS, backup Power
- \* Telecommunication
- \* Medical equipment
- \* Lighting

### Physical Dimension

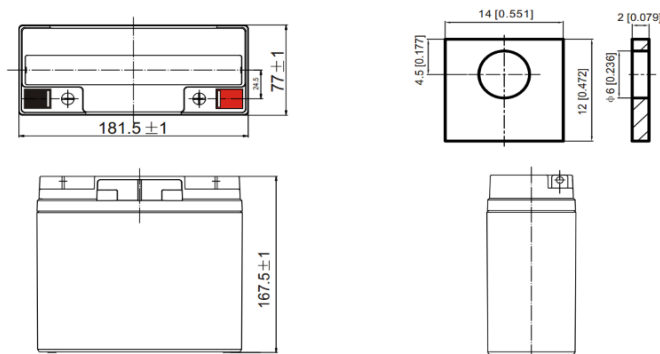


### Specification:

<b>Electrical Characteristics</b>	Nominal Voltage	12.8V
	Nominal Capacity	20AH
	Energy	256Wh
	Internal Resistance	≤50mΩ
	Cycle life	>2000 cycles at 0.2C 100% DOD at 25°C
	Months Self Discharge	<3%
	Efficiency of Charge	100% at 0.5C
	Efficiency of discharge	96~99% at 1C
<b>Charge</b>	Charge volt	14.6+/-0.2V
	Charge Mode	CC at 0.2C to 14.6V, then at CV14.6V to charge current less than 0.02C
	Standard charge	4A
	Quick Charge Current	10A
	Max. Charge current	20A
	Charge cut off voltage	15.6V+/-0.2V
<b>Discharge</b>	Standard discharge Current	4A
	Quick discharge current	10A
	Max. continous discharge	30A
	Max. Pulse Current	50A (<3s)
	Discharge Cut-off Voltage	8V
<b>Environment</b>	Charge Temperature	0°C to 45°C (32F to 113F) at 60±25% Relative Humidity
	Discharge Temperature	- 20°C to 60°C (-4F to 140F) at 60±25% Relative Humidity
	Storage Temperature	0°C to 40°C (32F to 104F) 60±25% Relative Humidity
	Water Dust Resistance	IP56
<b>Mechanical</b>	Cell material	LiFePO4 26650 4S7P
	Plastic Case	ABS
	Dimensions (in./mm)	181*77*167mm(7.13**3.03**6.57")
	Weight (lbs./kg.)	2.7KG (5.958 lbs)
	Terminal	T3


**Discharge Curve at different rate at 25°C**

**Discharge Curve at different temperature at 0.5C rate**

Different Rate Discharge Curve @25°C

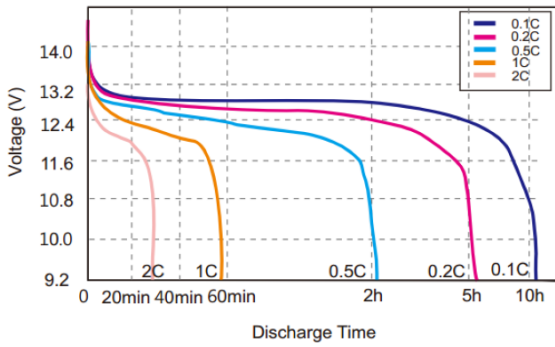


Different Temperature Discharge Curve @0.5C

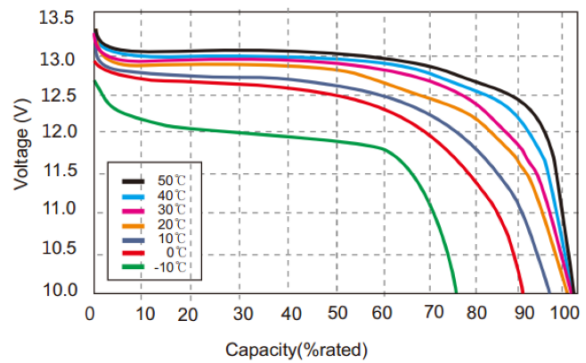


**Discharge Curve at different rate at 25°C**

**Discharge Curve at different rate at 25°C**

State of Charge Curve @0.5C 25°C

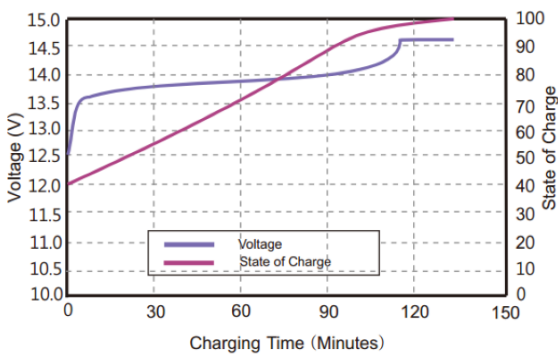


Charging Characteristics @0.5C 25°C

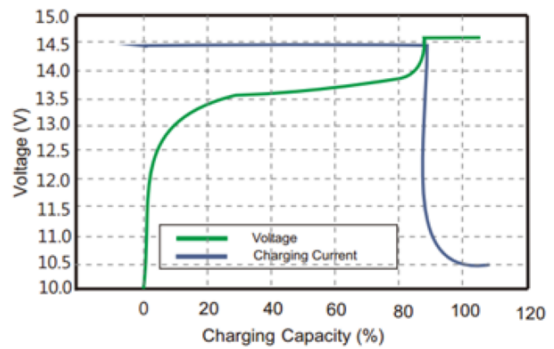

**Cycle Life Curve in Different DOD Discharge at 1C**

**Different Temperature Self Discharge Curve**

Different DOD Discharge Cycle Life Curve @1C

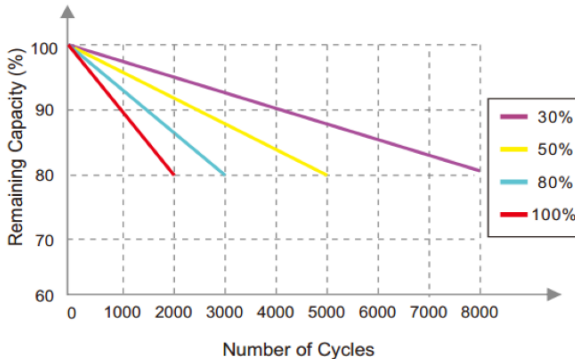

Different Temperature Self Discharge Curve

